


## SFE2000 Flange Facing Portable Machine


Solutions for on-site machining

Precise and powerful externally mounted flange facing machine for on site applications. Designed and built for heat exchanger channel flanges with integral tube bundle.

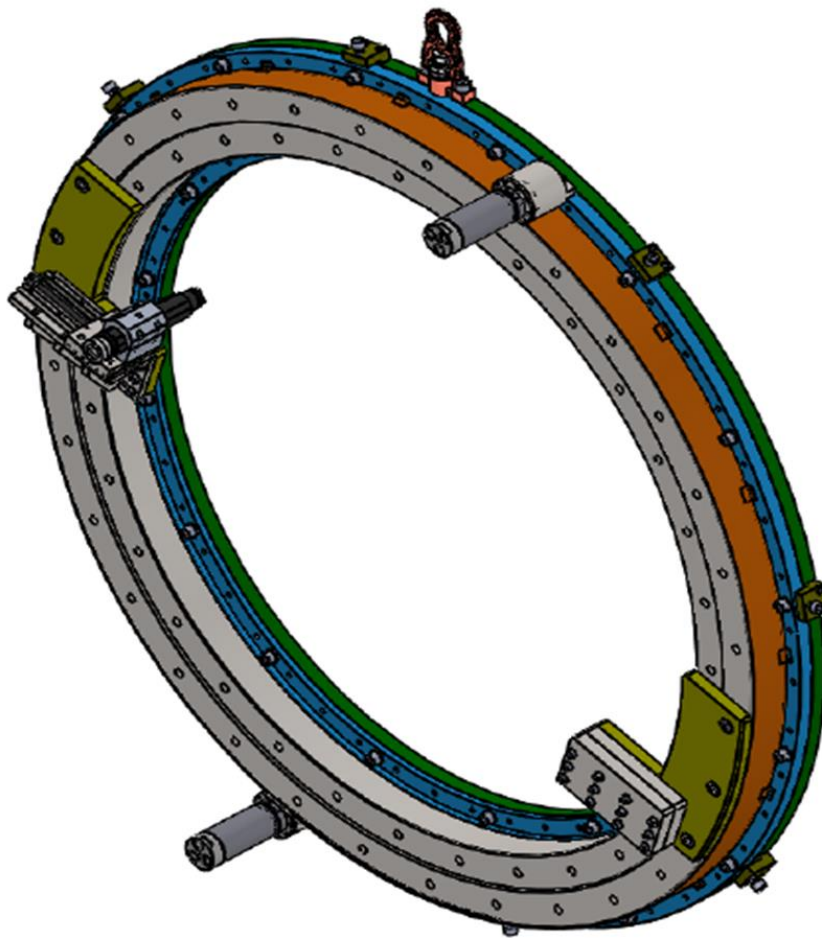

- ✓ High precision crossed roller bearing
- ✓ Twin pneumatic drive
- ✓ Robust welded carbon steel structure
- ✓ Excellent rigidity

Range		
Min. / Max facing diameter	0 mm (0")	1900 mm (75")
Min. / Max clamping diameter	N.A.	N.A.
Min. / Max rotation RPM	0	25
Rotational Drive - twin pneumatica	6 kW	8 Hp
Weights and Dimensions		
Machine weight	2500 kg	5511 lbs
Shipping weight	2800 kg	6173 lbs
Shipping dimensions	2400x2800x400mm	102x118x16 inches
Power		
Air Pressure	8 bar (116 psi)	
Air Flow	8000 l/min (282,5 ft3/m)	

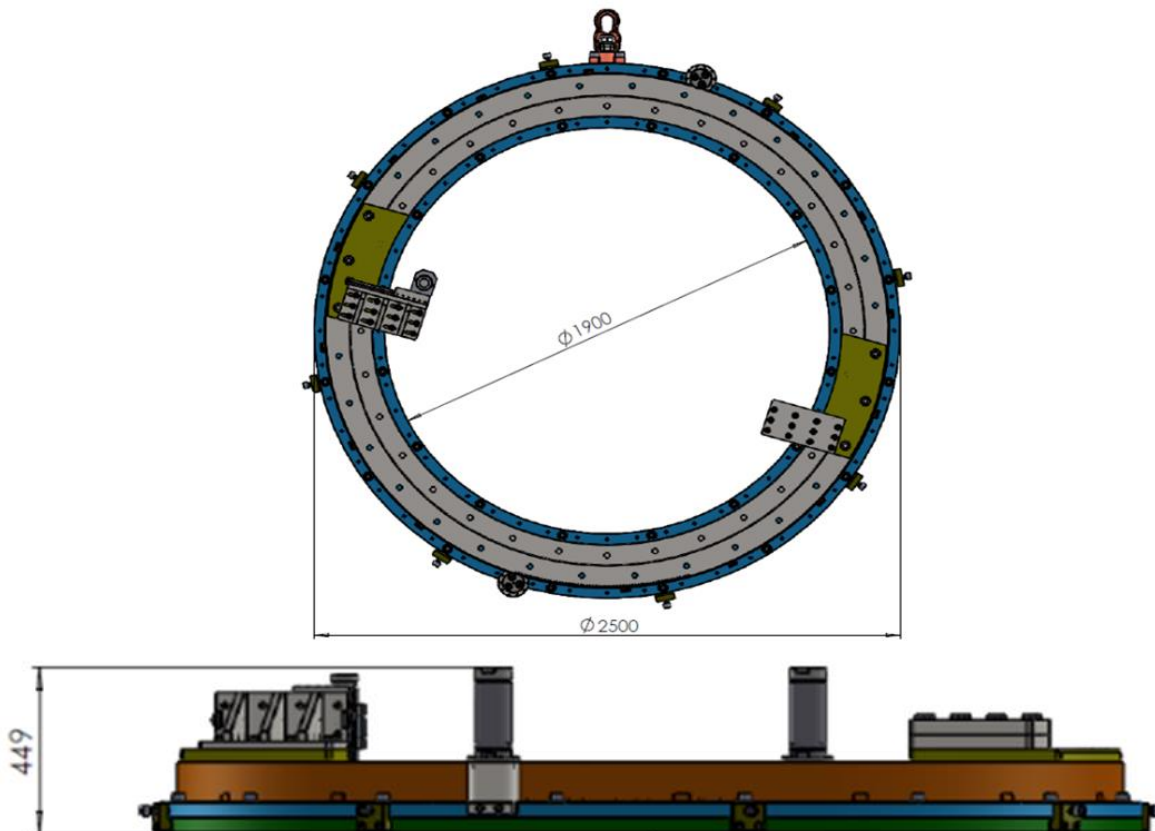

*The machine is supplied complete with toolkit, CE certificate, Packing List, metal box.  
 Technical information contained in this datasheet are subject to change without notice.*

EUREKA SFE2000 V.2020-01.docx

